


GPI[®]

G20-012PX



IECEx

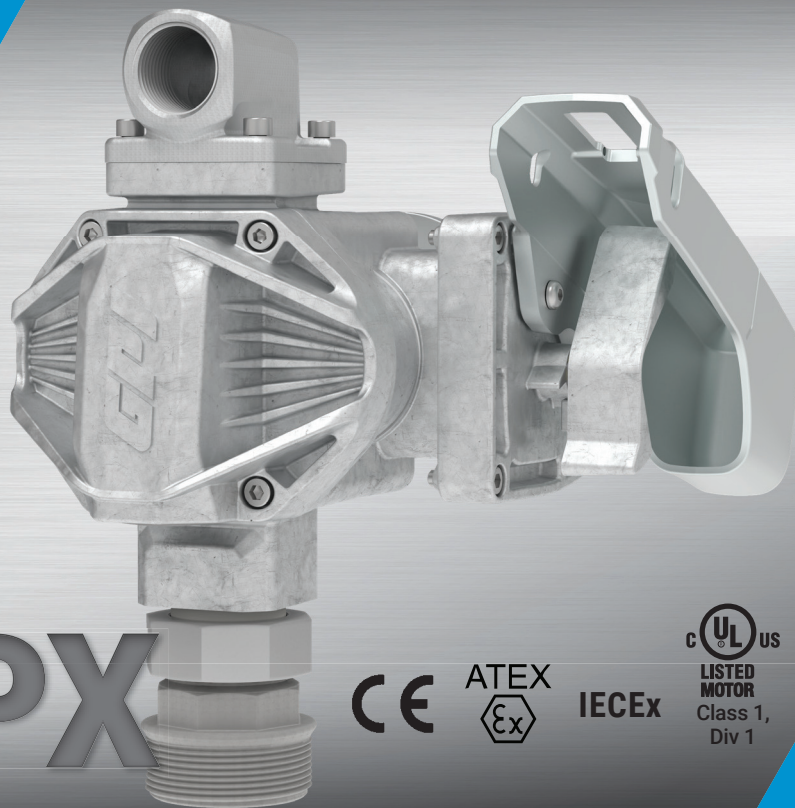

QUICK-FIT MODULAR *Accessories*



The **G20** is the first gear pump to deliver **True 20 GPM** with a 14-ft. hose and automatic nozzle. Its unique rotary gear design ensures a long product life with minimal maintenance. As the first pump in **GPI's new G Series**, the G20 features an innovative design with simplified connection points that make attaching accessories fast and easy.

- ▶ **Quick-Fit accessories** allow you to quickly attach a filter, meter, or both to customize your personal fuel station.
- ▶ **Quick-Fit accessories** feature a simple four-bolt connection with no-leak flange and O-ring, making them easy to install.



with
Meter &
Filter Kit



with
Filter Kit




with
Meter

FUEL TRANSFER PUMP • 12V (DC) • TRUE 20 GPM

GPI®

G20

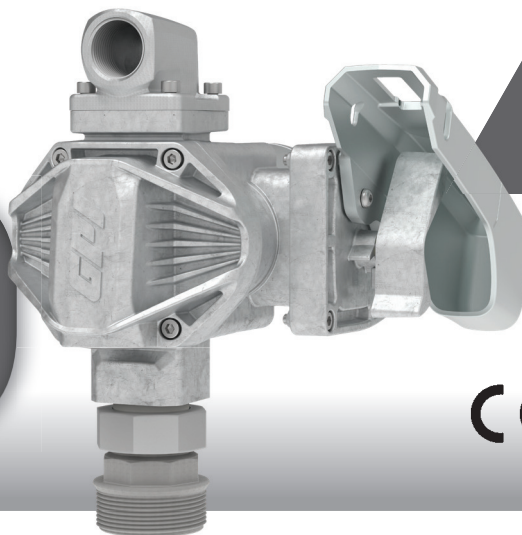

**STANDARD
PRESSURE**

IDEAL FOR USE WITH
AUTO NOZZLE
METER



IECEx



Class 1, Div 1

PUMP HOUSING

Corrosion-resistant diecast aluminum

PERFORMANCE

Flow Rate: 20 GPM (76 L/min)

Duty Cycle: 30 min. ON,
30 min. OFF

ELECTRICAL

Input: 12V (dc) with 40-amp
circuit breaker switch

Type: Rotary Gear

Current Draw: 34-amps

Motor: 2000 RPM, .38 HP

Motor
Approvals: cULus Listed,
Class I Div 1 Group D
IECEx Ex db IIA T4 Gb
ATEX II 2 G Ex db IIA
T4 Gb

OPERATING PRESSURE

12 psi (0.82 bar) - Standard Pressure

OPERATING TEMPERATURE

-22°F to 131°F (-30°C to 55°C)

MECHANICAL CONNECTIONS

Inlet: 1 in. NPT

Outlet: 1 in. NPT



Designed for use with diesel
(up to B20), gasoline, ethanol blends
(up to E15), and kerosene.

FEATURES & BENEFITS

- ▶ **TRUE GPM**
 - Full 20 GPM at the nozzle for fast refueling
- ▶ **DIECAST ALUMINUM HOUSING**
 - Corrosion-resistant
 - Lightweight - weighs 19 lbs.
 - Low stress on tank
- ▶ **ROTARY GEAR DESIGN**
 - Fewer moving parts = less friction and less wear on components
 - Minimal maintenance and longer pump life
- ▶ **SPIN COLLAR MOUNT**
 - Allows much easier installation and pump orientation
- ▶ **CIRCUIT BREAKER PROTECTION**
 - Prevents overheating
 - Helps extend pump life
- ▶ **QUICK-FIT ACCESSORIES**
 - Easily attach a filter, meter or both to build your own custom system
 - Simple four-bolt connections can be mounted in multiple directions
 - No pipe fittings, tape, or sealant required for installation of Quick-Fit accessories
 - Eco-friendly, no-leak flange and O-ring eliminate threaded pipe leaks

ORDERING INFORMATION

Part No.	Model	Nozzle	Power Cord	Suction Pipe	Hose
162000-01	G20-012PX	None	None	None	None

QUICK-FIT ACCESSORIES

Part No.	Description
129500-01	Kit, Filter, Modular, 1 3/8 in.
165100-01	Meter, M30-G8N, GAL, NPT, (BOT-TOP), UL
165100-02	Meter, M30-L8N, LTR, NPT, (BOT-TOP), UL

ADDITIONAL ACCESSORIES

Part No.	Description
129340-07	Filter, P-25-10-1 3/8 in.
110241-01	Suction Pipe, Telescoping 15 to 40 in.
110242-01	Power Cord Kit, 18 ft. (5.5 M), 12/2 AWG/Div 2
906008-570	1 in. Auto Nozzle, Diesel, NPT, U.L. Listed
110121-8	3/4 in. Auto Nozzle, Unleaded, NPT
110122-1	1 in. x 3/4 in. Reducer (for 3/4 in. Nozzle)



Wellington Head Office: 90 Sydney St, PO Box 38 720
Petone, Wellington, Tel: 64 4 568 4933, Fax: 64 4 568 4789
Email: sales@liquip.co.nz Website: www.liquip.co.nz